


X11 remote

On remote machine

- Edit sshd_config:

```
X11Forwarding yes
X11UseLocalhost yes
```

On local client

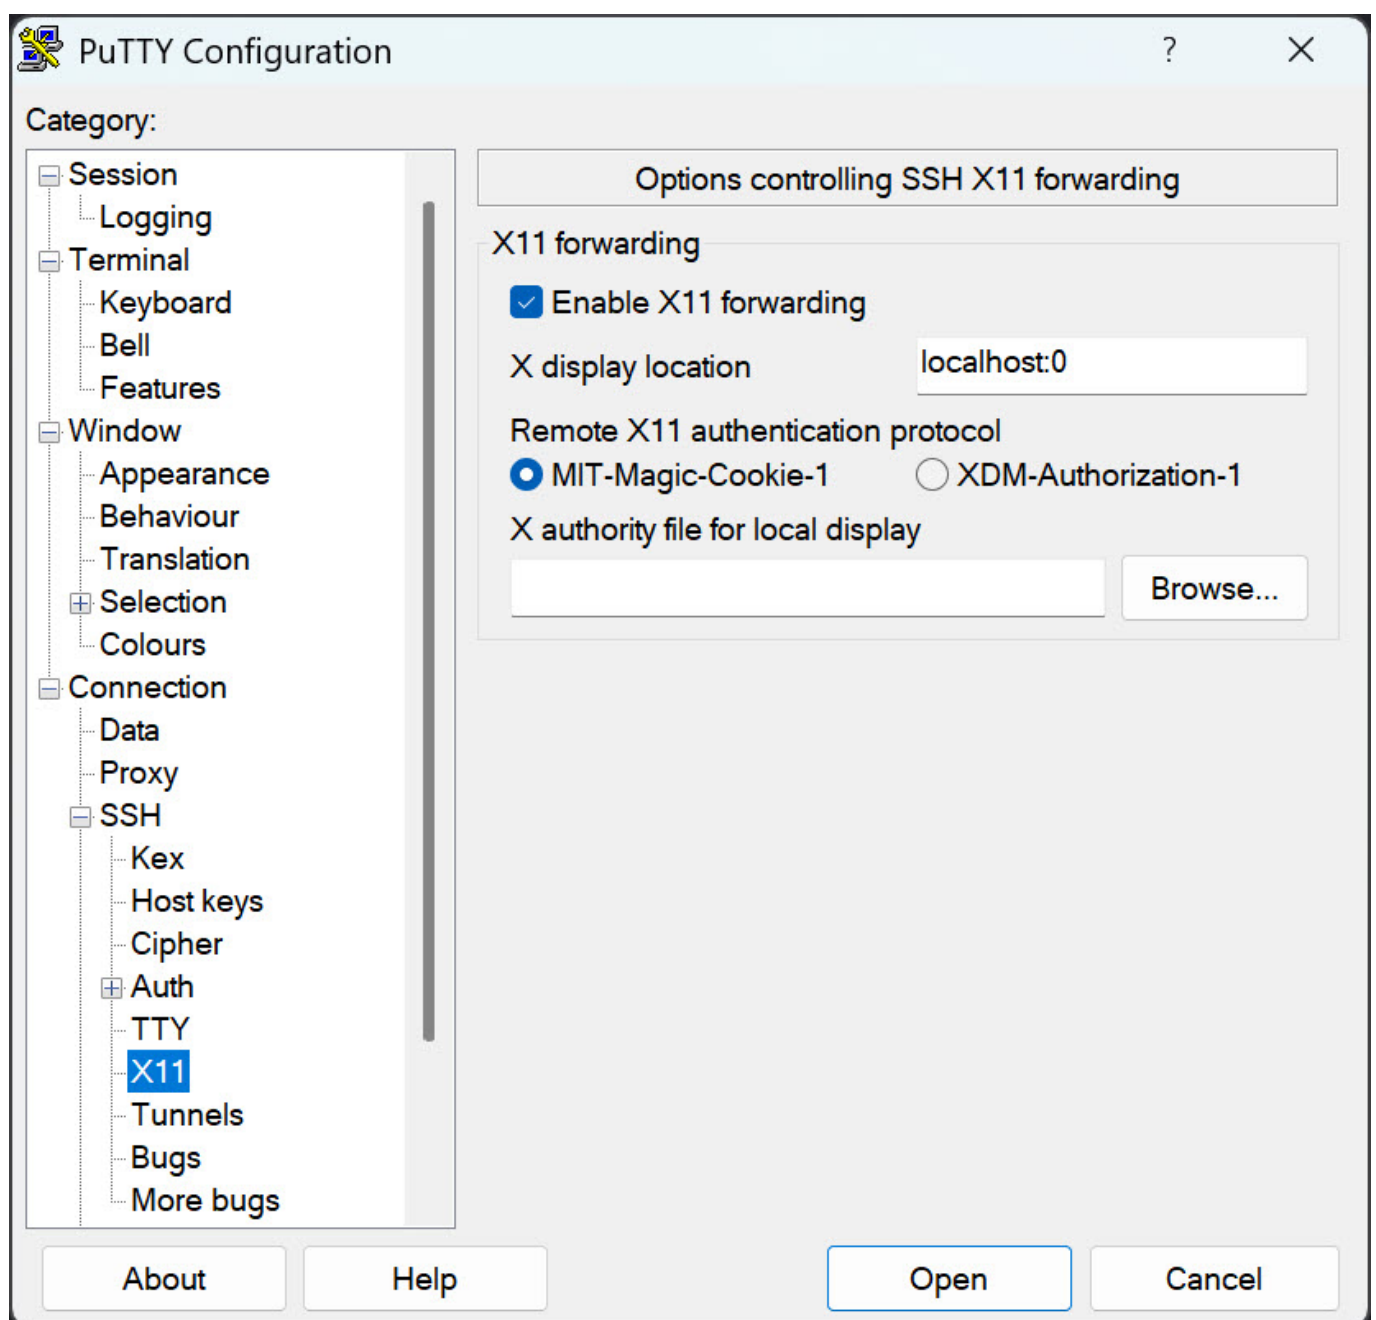

Save and restart the service: `sudo systemctl restart ssh`

From:
<https://wiki.condrau.com/> - **Bernard's Wiki**

Permanent link:
<https://wiki.condrau.com/deb12:x11?rev=1775286049>

Last update: **2026/04/04 14:00**

